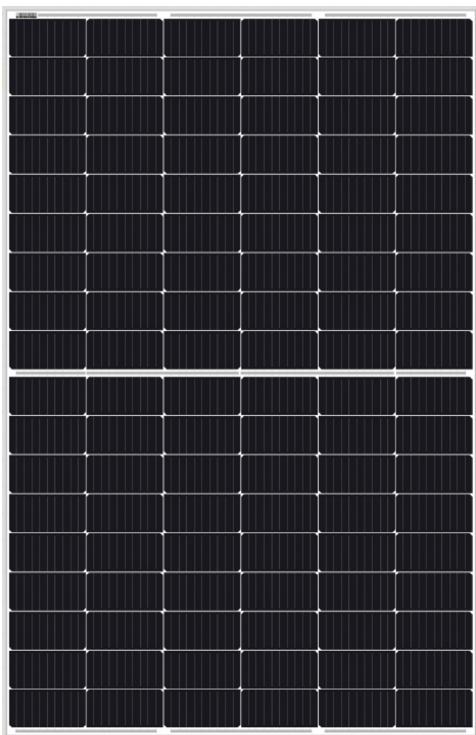

PRODUCT



SOLARWATT Panel classic AM 2.0 pure*

Glass-Foil-Module

Best price-performance ratio

With the classic models, Solarwatt offers affordable, robust, high-performance solar modules of proven quality. They are durable and high-yielding as well as resistant to weather effects and environmental influences.

The classic-modules are produced on state-of-the-art production lines and meet the high Solarwatt quality standards. They will therefore generate solar power well beyond their warranty period.

The modules come with a solid 15-year product guarantee.

* also available as a low carbon option with a particularly low CO₂ footprint (< 550 kg CO₂ eq / kWp).



PRODUCT QUALITY

- ammonia resistant
- salt mist resistant
- LeTID tested
- PID protected
- 100 % plus-sorting
- max. 5,400 / 2,400 Pa

SERVICE

FullCoverage insurance
optional (up to 1,000 kWp*)

simple returns policy
as per „Delivery terms for Solarwatt solar modules“

15 year product warranty
12 years product warranty outside Europe and Australia
as per „Warranty conditions for Solarwatt solar modules“

25 year performance warranty
on 84.8 % of nominal power as per „Warranty conditions for Solarwatt solar modules“

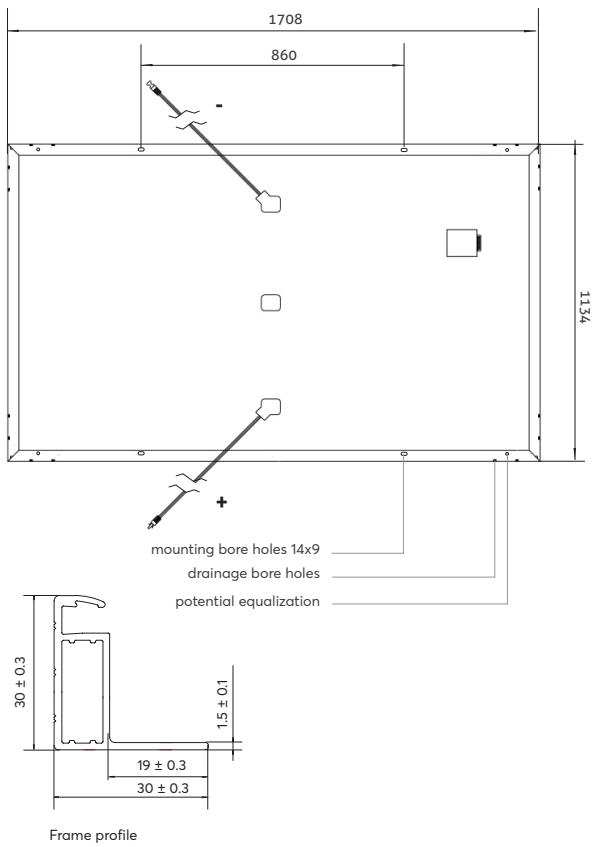
* country-specific deviations apply

Technical data sheet

SOLARWATT Panel classic AM 2.0 pure



DIMENSIONS



ELECTRICAL DATA (STC)

STC (Standard Test Conditions): Irradiation intensity 1,000 W/m², spectral distribution AM 1.5 | Temperature 25 ±2 °C, in accordance to EN 60904-3

| Nominal power P _{max} | 400 Wp | 405 Wp | 410 Wp |
|---------------------------------------|--------|--------|--------|
| Nominal voltage V _{mp} | 30.4 V | 30.9 V | 31.1 V |
| Nominal current I _{mp} | 13.2 A | 13.1 A | 13.2 A |
| Open circuit voltage V _{oc} | 37.2 V | 37.2 V | 37.3 V |
| Short circuit current I _{sc} | 13.6 A | 14.0 A | 14.1 A |
| Module efficiency | 20.7 % | 20.9 % | 21.2 % |

Measurement tolerances: P_{max} ±5 %; V_{oc} ±10 %; I_{sc} ±10 %, I_{mp} ±10 %

Reverse-current power rating I_r: 20 A, operating modules with an external power source is only permissible if using a phase fuse with a tripping current of ≤ 20 A.

ELECTRICAL DATA (NMOT AND WEAK LIGHT)

NMOT (Nominal Module Operating Temperature): Irradiation intensity 800 W/m², spectral distribution AM 1.5, Temperature 20 °C
Weak light conditions: Irradiation intensity 200 W/m², Temperature 25 °C, Wind speed 1 m/s, load operation

| Nominal power P _{max @NMOT} | 300 W | 326 W | 329 W |
|---|--------|--------|--------|
| Nominal power P _{max @200 W/m²} | 78.0 W | 79.9 W | 80.8 W |

Measurement tolerances: P_{max} ±5 %; V_{oc} ±10 %; I_{sc} ±10 %, I_{mp} ±10 %

Reduction of module efficiency when irradiance is reduced from 1,000 W/m² to 200 W/m² (at 25 °C): 4 ±2 % (relative) / -0.6±0.3 % (absolute).

GENERAL DATA

| | |
|--|---|
| Module technology | Glass-foil laminate; aluminum frame |
| Covering material | Tempered solar glass with anti-reflective finish |
| Encapsulation | Solar cells in polymer encapsulation |
| Backing material | Multi-layer composite film, white |
| Solar cells | 108 monocrystalline high power PERC solar cells |
| Cell dimensions | 182 x 91 mm |
| L x W x H / Weight | 1,708 x 1,134 ^{±2} x 30 ^{±0.3} mm / ca. 19.5 kg |
| Connection technology | Cables 2x 1.2 m / 4 mm ² , Stäubli Electrical MC4 or MC4-type connectors |
| Bypass diodes | 3 |
| Max. system voltage | 1,000 V |
| IP rating | IP68 |
| Protection class | II (acc. to IEC 61140) |
| Fire class | C (acc. to IEC 61730), BROOF (t1) (acc. to EN 13501-5) |
| Certified mechanical ratings as per IEC 61215 | Pressure load up to 3,600 Pa (test load 5,400 Pa) Suction load up to 1,600 Pa (test load 2,400 Pa) |
| Recommended stress load as per Installation Instructions | Please refer to the specifications in the Installation Instructions and Warranty Conditions. |
| Qualifications | IEC 61215 (incl. LeTID) IEC 61730 2 PFG 2387 (PID) IEC 61701 IEC 62716 MCS 005 |

THERMAL FEATURES

| | |
|--|----------------|
| Operating temperature range | -40 ... +85 °C |
| Ambient temperature range | -40 ... +45 °C |
| Temperature coefficient P _{max} | -0.33 %/K |
| Temperature coefficient V _{oc} | -0.25 %/K |
| Temperature coefficient I _{sc} | 0.05 %/K |
| NMOT | 44 °C |

TRANSPORT AND PACKAGING

| | |
|----------------------------------|--------------------------|
| Modules per pallet | 36 |
| Modules per container | 936 |
| Pallets per truck | 15 / 30 |
| Modules per truck | 540 / 1,080 |
| Gross weight per pallet | 734 / 1,468 kg |
| Pallet dimensions (packing size) | 1,750 x 1,140 x 1,250 mm |