


Form C: Type Test Verification Report

Type Approval and **Manufacturer** declaration of compliance with the requirements of G98/N1. This form should be used when making a Type Test submission to the Energy Networks Association (ENA).

If the **Micro-generator** is **Fully Type Tested** and already registered with the ENA **Type Test Verification Report** Register, the **Installation Document** should include the **Manufacturer's** Reference Number (the Product ID), and this form does not need to be submitted.

Where the **Micro-generator** is not registered with the ENA **Type Test Verification Report** Register this form needs to be completed and provided to NIE Networks, to confirm that the **Micro-generator** has been tested to satisfy the requirements of this EREC G98/N1.

| | | | |
|--|---|---|------------------|
| Manufacturer's reference number | | | |
| Micro-generator technology | | Battery Electric Energy Storage System with Photovoltaic hybrid inverter (inverter model : Inverter vision one 1.0 (3.7 kW), Inverter vision one 1.0 (3.0 kW)) | |
| Manufacturer name | | SOLARWATT GmbH | |
| Address | | Maria-Reiche-Straße 2a 01109 Dresden Germany | |
| Tel | +49-351-4676-1000 | Fax | |
| E-mail | sven.schwarz@solarwatt.com | Web site | www.solarwatt.de |
| Registered Capacity , use separate sheet if more than one connection option. | Connection Option | | |
| | 3.0 | kW single phase system | |
| | 3.68 | kW single phase system | |
| | | kW two phases in three phase system | |
| | | kW two phases split phase system | |
| Energy storage capacity for Electricity Storage devices | 4.8 - 35 | kWh | |
| Manufacturer Type Test declaration. - I certify that all products supplied by the company with the above Fully Type Tested reference number will be manufactured and tested to ensure that they perform as stated in this document, prior to shipment to site and that no site modifications are required to ensure that the product meets all the requirements of EREC G98. | | | |
| Signed |  | On behalf of | SOLARWATT GmbH |
| <p>Note that testing can be done by the Manufacturer of an individual component or by an external test house.</p> <p>Where parts of the testing are carried out by persons or organisations other than the Manufacturer then that person or organisation shall keep copies of all test records and results supplied to them to verify that the testing has been carried out by people with sufficient technical competency to carry out the tests.</p> | | | |

Operating Range: This test should be carried out as specified in A.1.2.10.


Pass or failure of the test should be indicated in the fields below (right hand side), for example with the statement "Pass", "No disconnection occurs", etc. Graphical evidence is preferred.

Test 1

Voltage = 85% of nominal (195.5 V) Frequency = 47.5 Hz

Power factor = 1

Period of test 90 minutes

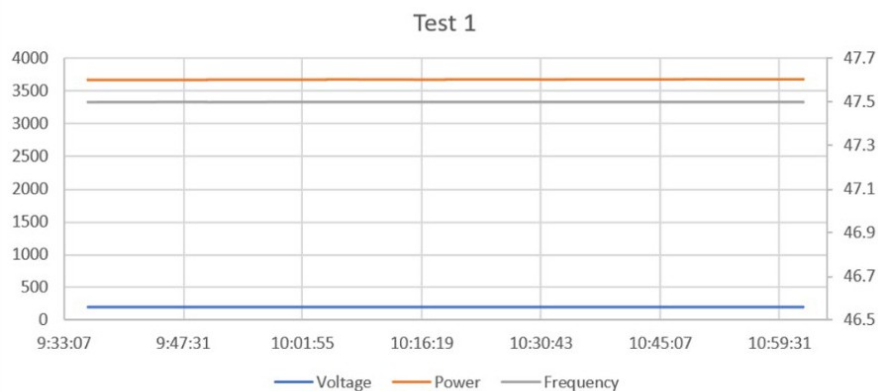


Test 2

Voltage = 110% of nominal (253 V). Frequency = 51.5 Hz

Power factor = 1

Period of test 90 minutes

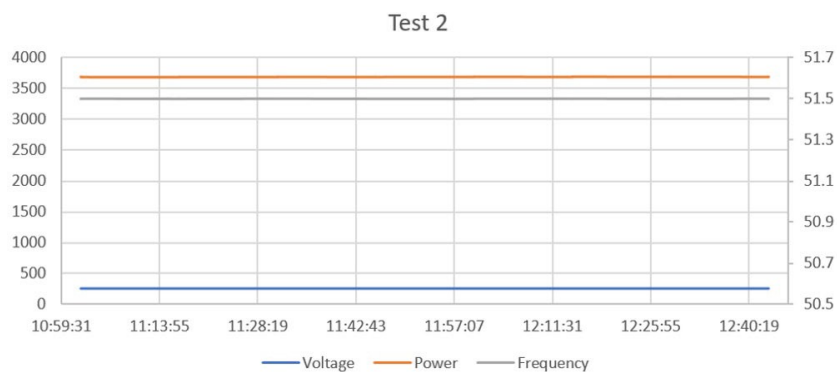


Test 3

Voltage = 110% of nominal (253 V). Frequency = 52.0 Hz

Power factor = 1

Period of test 15 minutes

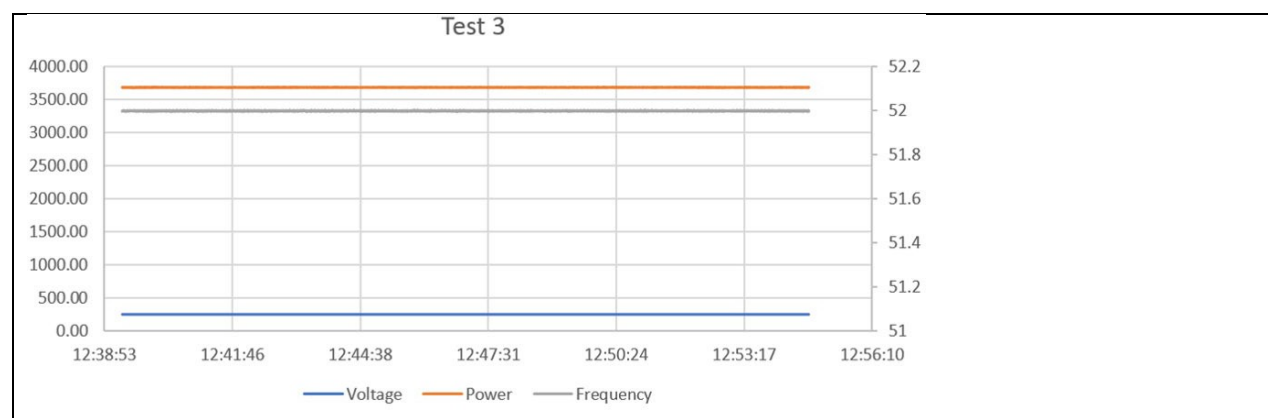


Test 4

Voltage = 110% of nominal (253 V).

Frequency = 52.0 Hz

Power factor = 1

Period of test 15 minutes

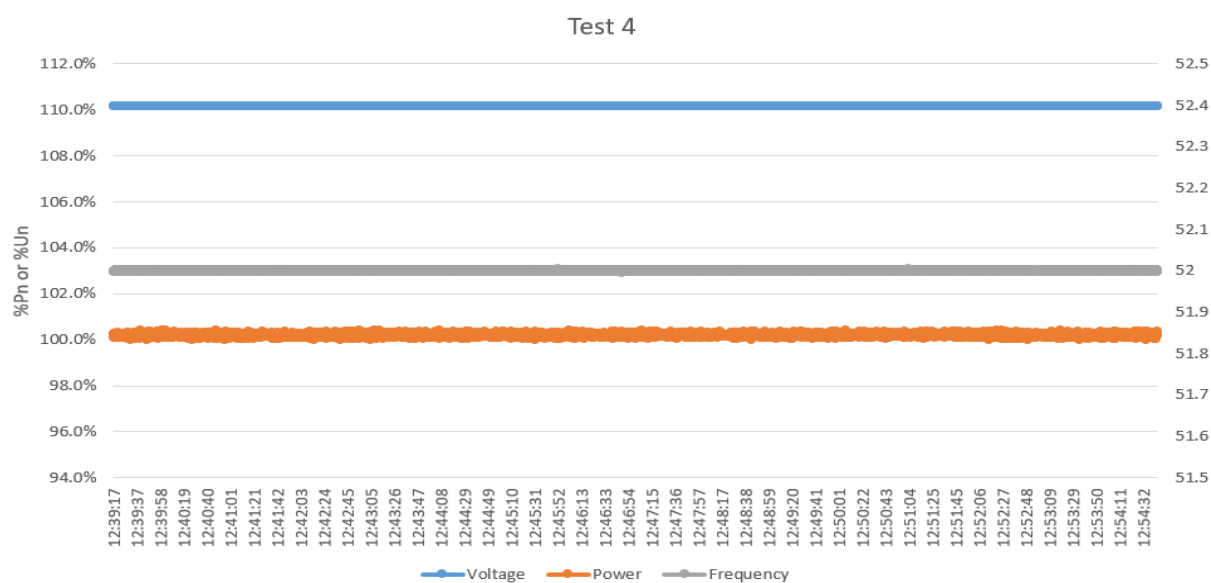


Test 5

Voltage = 100% of nominal (230 V).

Frequency = 50.0 Hz


Power factor = 1

Period of test 90 minutes

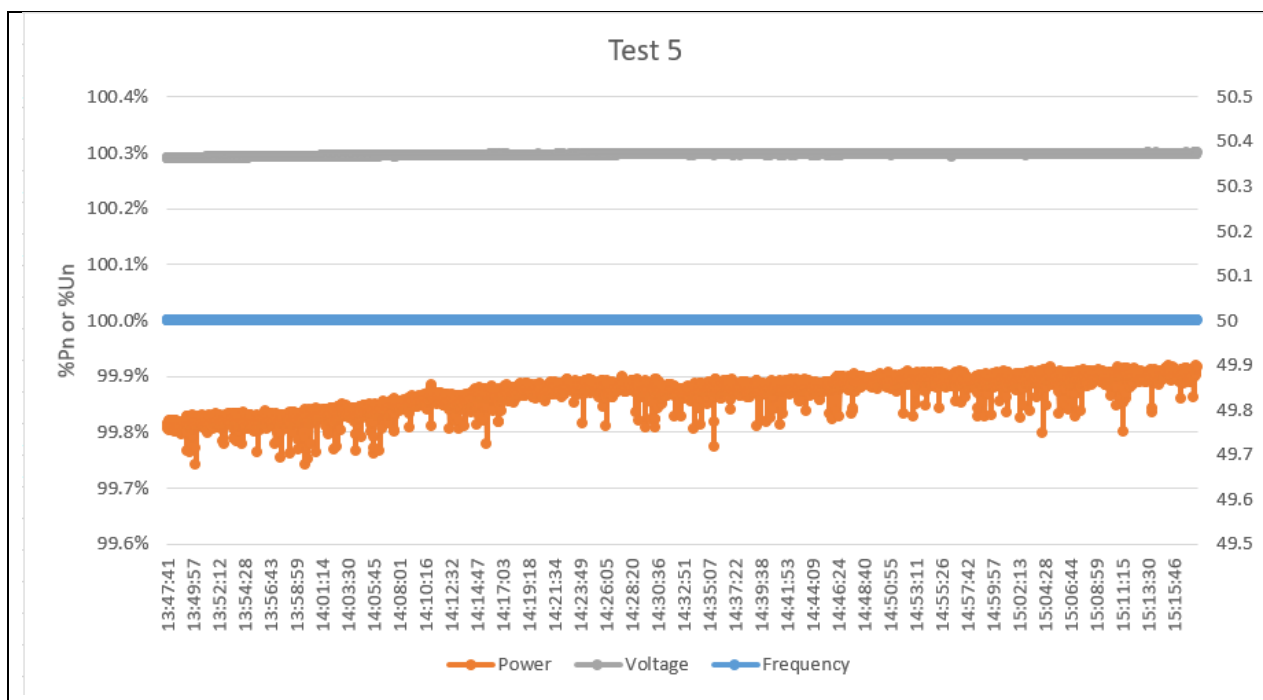

Test 6 RoCoF withstand

Confirm that the **Micro-Generating Plant** is capable of staying connected to the **Distribution Network** and operate at rates of change of frequency up to 1 Hzs⁻⁸ as measured over a period of 500 ms.

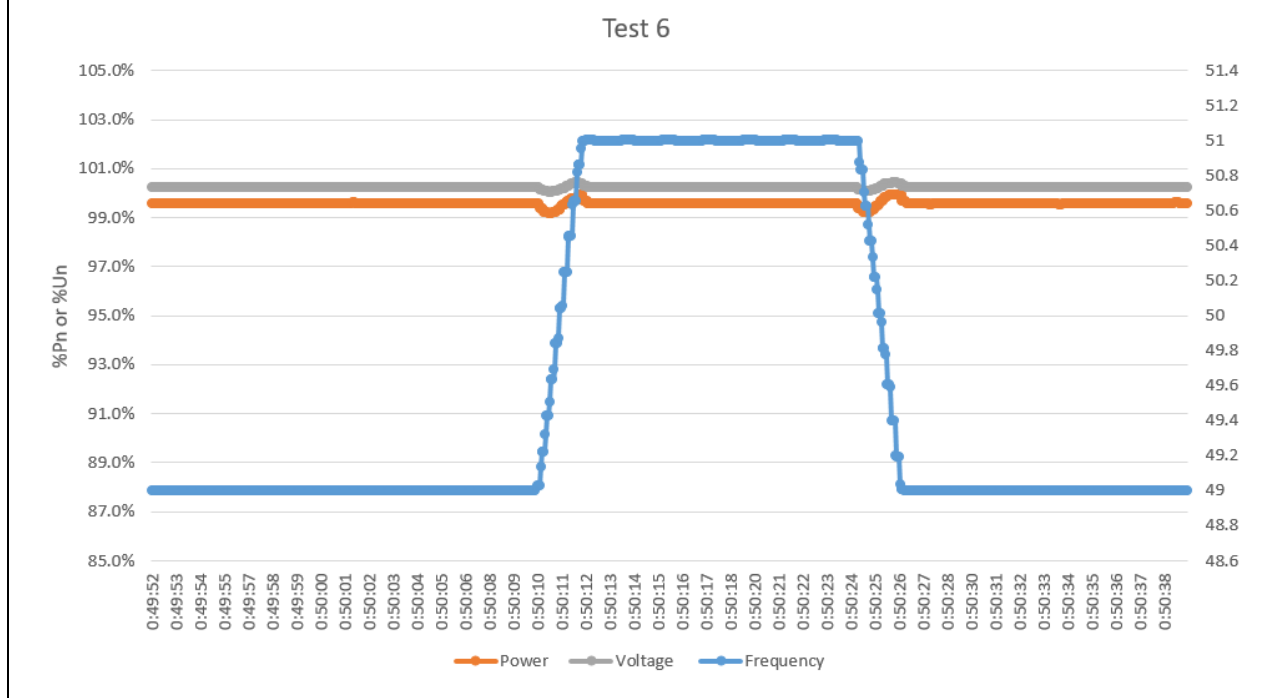

Power Quality – Harmonics: These tests should be carried out as specified in BS EN 61000-3-2. The chosen test should be undertaken with a fixed source of energy at two power levels a) between 45 and 55% and b) at 100% of **Registered Capacity**. The test requirements are specified in Annex A1 A.1.3.1 (**Inverter** connected) or Annex A2 A.2.3.1 (Synchronous).

Micro-generator tested to BS EN 61000-3-2

| | | | | | | | |
|--|---|-------|------------------------------------|-------|----------------------------------|---|---------------------------------------|
| Micro-generator rating per phase (rpp) | | | 3.68 | | kW | | Model: Inverter vision one 1.0(3.7kW) |
| For 3-phase Micro-generators , tick this box if harmonic measurements are identical for all three phases. If the harmonics are not identical for each phase, please replicate this section with the results for each phase. | | | | | | | |
| Harm nic | At 45-55% of Registered Capacity ¹ | | 100% of Registered Capacity | | | | |
| | Measured Value MV in Amps | | Measured Value MV in Amps | | Limit in BS EN 61000-3-2 in Amps | Higher limit for odd harmonics 21 and above | |
| 2 | 0.0291 | 0.36% | 0.0353 | 0.22% | 1.080 | | |
| 3 | 0.1555 | 1.94% | 0.4105 | 2.57% | 2.300 | | |
| 4 | 0.0201 | 0.25% | 0.0241 | 0.15% | 0.430 | | |
| 5 | 0.0568 | 0.71% | 0.0659 | 0.41% | 1.140 | | |
| 6 | 0.0146 | 0.18% | 0.0133 | 0.08% | 0.300 | | |
| 7 | 0.0358 | 0.45% | 0.0445 | 0.28% | 0.770 | | |
| 8 | 0.0278 | 0.35% | 0.0302 | 0.19% | 0.230 | | |
| 9 | 0.0183 | 0.23% | 0.0246 | 0.15% | 0.400 | | |
| 10 | 0.0226 | 0.28% | 0.0238 | 0.15% | 0.184 | | |
| 11 | 0.0131 | 0.16% | 0.0167 | 0.10% | 0.330 | | |
| 12 | 0.0253 | 0.32% | 0.0265 | 0.17% | 0.153 | | |
| 13 | 0.0191 | 0.24% | 0.0217 | 0.14% | 0.210 | | |
| 14 | 0.0209 | 0.26% | 0.0212 | 0.13% | 0.131 | | |
| 15 | 0.0204 | 0.25% | 0.0240 | 0.15% | 0.150 | | |
| 16 | 0.0207 | 0.26% | 0.0246 | 0.15% | 0.115 | | |
| 17 | 0.0228 | 0.29% | 0.0248 | 0.16% | 0.132 | | |
| 18 | 0.0185 | 0.23% | 0.0201 | 0.13% | 0.102 | | |
| 19 | 0.0205 | 0.26% | 0.0248 | 0.15% | 0.118 | | |

¹ See the note in A.2.3.1 if 45-55% of **Registered Capacity** is below the minimum stable operating level. If an alternative loading level is chosen, the level should be indicated on the test form and the reason for not testing at 45-55% of **Registered Capacity** should be stated. The additional comments box at the end of the harmonics test sheet can be used for this.

| | | | | | | | |
|--|---|-------|------------------------------------|-------|-------|---------------------------------------|--|
| 20 | 0.0167 | 0.21% | 0.0207 | 0.13% | 0.092 | | |
| 21 | 0.0232 | 0.29% | 0.0273 | 0.17% | 0.107 | 0.160 | |
| 22 | 0.0195 | 0.24% | 0.0203 | 0.13% | 0.084 | | |
| 23 | 0.0196 | 0.25% | 0.0225 | 0.14% | 0.098 | 0.147 | |
| 24 | 0.0128 | 0.16% | 0.0182 | 0.11% | 0.077 | | |
| 25 | 0.0169 | 0.21% | 0.0222 | 0.14% | 0.090 | 0.135 | |
| 26 | 0.0138 | 0.17% | 0.0156 | 0.10% | 0.071 | | |
| 27 | 0.0160 | 0.20% | 0.0193 | 0.12% | 0.083 | 0.124 | |
| 28 | 0.0163 | 0.20% | 0.0174 | 0.11% | 0.066 | | |
| 29 | 0.0194 | 0.24% | 0.0184 | 0.12% | 0.078 | 0.117 | |
| 30 | 0.0123 | 0.15% | 0.0129 | 0.08% | 0.061 | | |
| 31 | 0.0140 | 0.18% | 0.0177 | 0.11% | 0.073 | 0.109 | |
| 32 | 0.0125 | 0.16% | 0.0128 | 0.08% | 0.058 | | |
| 33 | 0.0141 | 0.18% | 0.0197 | 0.12% | 0.068 | 0.102 | |
| 34 | 0.0133 | 0.17% | 0.0138 | 0.09% | 0.054 | | |
| 35 | 0.0138 | 0.17% | 0.0168 | 0.10% | 0.064 | 0.096 | |
| 36 | 0.0111 | 0.14% | 0.0116 | 0.07% | 0.051 | | |
| 37 | 0.0140 | 0.17% | 0.0152 | 0.09% | 0.061 | 0.091 | |
| 38 | 0.0099 | 0.12% | 0.0119 | 0.07% | 0.048 | | |
| 39 | 0.0090 | 0.11% | 0.0113 | 0.07% | 0.058 | 0.087 | |
| 40 | 0.0094 | 0.12% | 0.0117 | 0.07% | 0.046 | | |
| Micro-generator rating per phase (rpp) | | | 3.0 | kW | | Model: Inverter vision one 1.0(3.7kW) | |
| For 3-phase Micro-generators , tick this box if harmonic measurements are identical for all three phases. If the harmonics are not identical for each phase, please replicate this section with the results for each phase. | | | | | | | |
| Harm nic | At 45-55% of Registered Capacity ² | | 100% of Registered Capacity | | | | |

² See the note in A.2.3.1 if 45-55% of **Registered Capacity** is below the minimum stable operating level. If an alternative loading level is chosen, the level should be indicated on the test form and the reason for not testing

ENA Engineering Recommendation G98/NI
Issue 1 2019

| | Measured Value MV in Amps | | Measured Value MV in Amps | | Limit in BS EN 61000-3-2 in Amps | Higher limit for odd harmonics 21 and above |
|----|---------------------------|-------|---------------------------|-------|----------------------------------|---|
| 2 | 0.0207 | 0.31% | 0.0240 | 0.18% | 1.080 | |
| 3 | 0.1554 | 2.35% | 0.2499 | 1.89% | 2.300 | |
| 4 | 0.0110 | 0.17% | 0.0158 | 0.12% | 0.430 | |
| 5 | 0.0554 | 0.84% | 0.0608 | 0.46% | 1.140 | |
| 6 | 0.0126 | 0.19% | 0.0111 | 0.08% | 0.300 | |
| 7 | 0.0369 | 0.56% | 0.0444 | 0.34% | 0.770 | |
| 8 | 0.0215 | 0.33% | 0.0194 | 0.15% | 0.230 | |
| 9 | 0.0180 | 0.27% | 0.0212 | 0.16% | 0.400 | |
| 10 | 0.0151 | 0.23% | 0.0111 | 0.08% | 0.184 | |
| 11 | 0.0149 | 0.23% | 0.0150 | 0.11% | 0.330 | |
| 12 | 0.0125 | 0.19% | 0.0137 | 0.10% | 0.153 | |
| 13 | 0.0198 | 0.30% | 0.0164 | 0.12% | 0.210 | |
| 14 | 0.0218 | 0.33% | 0.0255 | 0.19% | 0.131 | |
| 15 | 0.0230 | 0.35% | 0.0249 | 0.19% | 0.150 | |
| 16 | 0.0243 | 0.37% | 0.0259 | 0.20% | 0.115 | |
| 17 | 0.0196 | 0.30% | 0.0204 | 0.15% | 0.132 | |
| 18 | 0.0179 | 0.27% | 0.0152 | 0.12% | 0.102 | |
| 19 | 0.0221 | 0.34% | 0.0220 | 0.17% | 0.118 | |
| 20 | 0.0137 | 0.21% | 0.0142 | 0.11% | 0.092 | |
| 21 | 0.0177 | 0.27% | 0.0187 | 0.14% | 0.107 | 0.160 |
| 22 | 0.0158 | 0.24% | 0.0172 | 0.13% | 0.084 | |
| 23 | 0.0202 | 0.31% | 0.0223 | 0.17% | 0.098 | 0.147 |
| 24 | 0.0196 | 0.30% | 0.0235 | 0.18% | 0.077 | |
| 25 | 0.0163 | 0.25% | 0.0234 | 0.18% | 0.090 | 0.135 |
| 26 | 0.0130 | 0.20% | 0.0148 | 0.11% | 0.071 | |

at 45-55% of **Registered Capacity** should be stated. The additional comments box at the end of the harmonics test sheet can be used for this.

| | | | | | | |
|---|--------|-------|--------|-------|-------|-------|
| 27 | 0.0149 | 0.23% | 0.0203 | 0.15% | 0.083 | 0.124 |
| 28 | 0.0153 | 0.23% | 0.0196 | 0.15% | 0.066 | |
| 29 | 0.0157 | 0.24% | 0.0169 | 0.13% | 0.078 | 0.117 |
| 30 | 0.0124 | 0.19% | 0.0144 | 0.11% | 0.061 | |
| 31 | 0.0150 | 0.23% | 0.0173 | 0.13% | 0.073 | 0.109 |
| 32 | 0.0127 | 0.19% | 0.0154 | 0.12% | 0.058 | |
| 33 | 0.0142 | 0.21% | 0.0172 | 0.13% | 0.068 | 0.102 |
| 34 | 0.0117 | 0.18% | 0.0155 | 0.12% | 0.054 | |
| 35 | 0.0116 | 0.18% | 0.0142 | 0.11% | 0.064 | 0.096 |
| 36 | 0.0118 | 0.18% | 0.0110 | 0.08% | 0.051 | |
| 37 | 0.0122 | 0.18% | 0.0155 | 0.12% | 0.061 | 0.091 |
| 38 | 0.0112 | 0.17% | 0.0087 | 0.07% | 0.048 | |
| 39 | 0.0105 | 0.16% | 0.0110 | 0.08% | 0.058 | 0.087 |
| 40 | 0.0078 | 0.12% | 0.0078 | 0.06% | 0.046 | |
| Note the higher limits for odd harmonics 21 and above are only allowable under certain conditions, if these higher limits are utilised please state the exemption used as detailed in part 6.2.3.4 of BS EN 61000-3-2 in the box below. | | | | | | |
| Additional comments: | | | | | | |

Power Quality – Voltage fluctuations and Flicker: These tests should be undertaken in accordance with EREC G98 Annex A1 A.1.3.3 (**Inverter** connected) or Annex A2 A.2.3.3 (Synchronous).

The standard test impedance is 0.4 Ω for a single phase **Micro-generating Plant** (and for a two phase unit in a three phase system) and 0.24 Ω for a three phase **Micro-generating Plant** (and for a two phase unit in a split phase system). Please ensure that both test and standard impedance are completed on this form. If the test impedance (or the measured impedance) is different to the standard impedance, it must be normalised to the standard impedance as follows (where the **Power Factor** of the generation output is 0.98 or above):

$d \text{ max normalised value} = (\text{Standard impedance} / \text{Measured impedance}) \times \text{Measured value}.$

Where the **Power Factor** of the output is under 0.98 then the X to R ratio of the test impedance should be close to that of the standard impedance.

The stopping test should be a trip from full load operation.

The duration of these tests needs to comply with the particular requirements set out in the testing notes for the technology under test.

The test date and location must be declared.

| | | | |
|-----------------|------------|---------------|------------|
| Test start date | 2024-09-19 | Test end date | 2024-09-20 |
|-----------------|------------|---------------|------------|

| | | | | | | | | |
|---|---|-----------------|------|----------|-------|------------------|-----------------|-------------------------|
| Test location | FoxESS Testing Lab No.8, Xiqin Road, Xinwu District, Wuxi City, Jiangsu Province, China | | | | | | | |
| | Starting | | | Stopping | | | Running | |
| | d(max) | d(c) | d(t) | d(max) | d(c) | d(t) | P _{st} | P _{lt} 2 hours |
| Measured Values at test impedance | 0.537 | 0.067 | 0 | 0.529 | 0.022 | 0 | 0.089 | 0.091 |
| Normalised to standard impedance | 0.537 | 0.067 | 0 | 0.529 | 0.022 | 0 | 0.089 | 0.091 |
| Normalised to required maximum impedance | NA | NA | NA | NA | NA | NA | NA | NA |
| Limits set under BS EN 61000-3-11 | 4% | 3.3% | 3.3% | 4% | 3.3% | 3.3% | 1.0 | 0.65 |
| | | | | | | | | |
| Test Impedance | R | 0.4 | Ω | | X | 0.25 | | Ω |
| Standard Impedance | R | 0.24 * 0.4 ^ | Ω | | X | 0.15 * 0.25 ^ | | Ω |
| Maximum Impedance | R | | Ω | | X | | | Ω |
| <p>*Applies to three phase and split single phase Micro-generators. Delete as appropriate.</p> <p>^ Applies to single phase Micro-generators and Micro-generators using two phases on a three phase system. Delete as appropriate.</p> | | | | | | | | |

Power quality – DC injection: This test should be carried out in accordance with A 1.3.4 as applicable.

The % **DC** injection (“as % of rated AC current” below) is calculated as follows:

% **DC** injection = Recorded **DC** value in Amps / base current

where the base current is the **Registered Capacity** (W) / 230 V. The % **DC** injection should not be greater than 0.25%.

| | | | | |
|--------------------------------|-----|-----|-----|------|
| Inverter vision one 1.0(3.7kW) | | | | |
| Test power level | 20% | 50% | 75% | 100% |

| | | | | |
|----------------------------------|--------|--------|--------|--------|
| Recorded DC value in Amps | 0.022 | 0.017 | 0.023 | 0.023 |
| as % of rated AC current | 0.141% | 0.139% | 0.149% | 0.148% |
| Limit | 0.25% | 0.25% | 0.25% | 0.25% |
| Inverter vision one 1.0(3.0kW) | | | | |
| Test power level | 20% | 50% | 75% | 100% |
| Recorded DC value in Amps | 0.023 | 0.023 | 0.025 | 0.025 |
| as % of rated AC current | 0.176% | 0.183% | 0.192 | 0.193 |
| Limit | 0.25% | 0.25% | 0.25% | 0.25% |

Power Quality – Power factor: This test shall be carried out in accordance with A.1.3.2 and A.2.3.2 at three voltage levels and at **Registered Capacity** and the measured **Power Factor** must be greater than 0.95 to pass. Voltage to be maintained within $\pm 1.5\%$ of the stated level during the test.

| | | | | |
|--------------------------------|-----------------|-----------------|-----------------|--|
| Inverter vision one 1.0(3.7kW) | | | | |
| | 216.2 V | 230 V | 253 V | |
| 20% of Registered Capacity | 0.9966(leading) | 0.9968(leading) | 0.9967(leading) | |
| 50% of Registered Capacity | 0.9988(leading) | 0.9988(leading) | 0.9987(leading) | |
| 75% of Registered Capacity | 0.9994(leading) | 0.9994(leading) | 0.9993(leading) | |
| 100% of Registered Capacity | 0.9996(leading) | 0.9996(leading) | 0.9996(leading) | |
| Power Factor Limit - leading | >-0.95 | >-0.95 | >-0.95 | |
| Power Factor Limit – lagging | >0.98 | >0.98 | >0.98 | |
| Inverter vision one 1.0(3.0kW) | | | | |
| 20% of Registered Capacity | 0.9961(leading) | 0.9964(leading) | 0.9962(leading) | |
| 50% of Registered Capacity | 0.9983(leading) | 0.9983(leading) | 0.9983(leading) | |
| 75% of Registered Capacity | 0.9991(leading) | 0.9991(leading) | 0.9991(leading) | |
| 100% of Registered Capacity | 0.9991(leading) | 0.9995(leading) | 0.9994(leading) | |
| Power Factor Limit - leading | >-0.95 | >-0.95 | >-0.95 | |
| Power Factor Limit – lagging | >0.98 | >0.98 | >0.98 | |

Protection – Frequency tests: These tests should be carried out in accordance with Annex A1 A.1.2.3 (**Inverter** connected) or Annex A2 A.2.2.3 (Synchronous). For trip tests, frequency and time delay should be stated. For “no trip tests”, “no trip” can be stated.

| Function | Setting | | Trip test | | “No trip tests” | |
|----------|-----------|------------|-----------|------------|--------------------|-----------------|
| | Frequency | Time delay | Frequency | Time delay | Frequency /time | Confirm no trip |
| U/F | 48Hz | 0.5s | 47.95Hz | 0.527s | 48.2 Hz 25 s | No trip |
| | | | | | 47.8 Hz 0.45 s | No trip |
| O/F | 52Hz | 1.0s | 52.05Hz | 1.003s | 51.8 Hz 120.0 s | No trip |
| | | | | | 52.2 Hz 0.98 s | No trip |

Note. For frequency trip tests the frequency required to trip is the setting ± 0.1 Hz. In order to measure the time delay a larger deviation than the minimum required to operate the protection can be used. The “No trip tests” need to be carried out at the setting ± 0.2 Hz and for the relevant times as shown in the table above to ensure that the protection will not trip in error.

Protection – Voltage tests: These tests should be carried out in accordance with Annex A1 A.1.2.2 (**Inverter** connected) or Annex A2 A.2.2.2 (Synchronous). For trip tests, voltage and time delay should be stated. For “no trip tests”, “no trip” can be stated.

| Function | Setting | | Trip test | | “No trip tests” | |
|-------------|---------|------------|-----------|------------|-----------------|-----------------|
| | Voltage | Time delay | Voltage | Time delay | Voltage /time | Confirm no trip |
| U/V stage 1 | 195.5V | 3s | 194.5V | 3.085s | 199.5 V 5.0s | No trip |
| U/V stage 2 | 138V | 2s | 137.5V | 2.06s | 142V 2.5s | No trip |
| | | | | | 134 V 1.98 s | No trip |
| O/V | 253V | 0.5 s | 253.5V | 0.568s | 249V 5.0 s | No trip |
| | | | | | 257 V 0.45 s | No trip |

Note for Voltage tests the Voltage required to trip is the setting ± 3.45 V. The time delay can be measured at a larger deviation than the minimum required to operate the protection. The No trip tests need to be carried out at the setting ± 4 V and for the relevant times as shown in the table above to ensure that the protection will not trip in error.

Protection – Loss of Mains test: For PV **Inverters** shall be tested in accordance with BS EN 62116. Other **Micro-generators** should be tested in accordance with A.2.2.4 at 10%, 55% and 100% of rated power.

For **Inverters** tested to BS EN 62116 the following sub set of tests should be recorded in the following table.

| | | | | | | |
|--|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------|
| Test Power and imbalance | 33% -5% Q Test 22 | 66% -5% Q Test 12 | 100% -5% P Test 5 | 33% +5% Q Test 31 | 66% +5% Q Test 21 | 100% +5% P Test 10 |
| Trip time. Limit is 0.5 s ³ | 0.278s | 0.257s | 0.261s | 0.220s | 0.244s | 0.217s |

Protection – Frequency change, Vector Shift Stability test: This test should be carried out in accordance with EREC G98 Annex A1 A.1.2.6 (**Inverter** connected) or Annex A2 A.2.2.6 (Synchronous). Confirmation is required that the **Micro-generating Plant** does not trip under positive / negative vector shift.

| | | | |
|-----------------------|-----------------|--------------|-----------------|
| | Start Frequency | Change | Confirm no trip |
| Positive Vector Shift | 49.0 Hz | +50 degrees | No trip |
| Negative Vector Shift | 50.0 Hz | - 50 degrees | No trip |

Protection – Frequency change, RoCoF Stability test: The requirement is specified in section 11.3, test procedure in Annex A.1.2.6 (**Inverter** connected) or Annex A2 A.2.2.6 (Synchronous). Confirmation is required that the **Micro-generating Plant** does not trip for the duration of the ramp up and ramp down test.

| | | | |
|--------------------|-------------------------|---------------|-----------------|
| Ramp range | Test frequency ramp: | Test Duration | Confirm no trip |
| 49.0 Hz to 51.0 Hz | +0.95 Hzs ⁻¹ | 2.1 s | No trip |
| 51.0 Hz to 49.0 Hz | -0.95 Hzs ⁻¹ | 2.1 s | No trip |

Limited Frequency Sensitive Mode – Overfrequency test: This test should be carried out in accordance with EN 50438 Annex D.3.3 Power response to over- frequency. The test should be carried out using the specific threshold frequency of 50.2 Hz and **Droop** of 4%.

| Test sequence at Registered Capacity >80% | Measured Active Power Output(W) | Frequency (Hz) | Primary Power Source | Active Power Gradient |
|--|--|----------------|----------------------|------------------------------|
| Step a) 50.00 Hz ±0.01 Hz | 3683 | 50.00 | DC SOURCE | NA |
| Step b) 50.25 Hz ±0.05 Hz | 3595 | 50.25 | | 4.19% |
| Step c) 50.70 Hz ±0.10 Hz | 2781 | 50.70 | | 4.08% |
| Step d) 51.15 Hz ±0.05 Hz | 1958 | 51.15 | | 4.06% |
| Step e) 50.70 Hz ±0.10 Hz | 2789 | 50.70 | | 4.12% |
| Step f) 50.25 Hz ±0.05 Hz | 3597 | 50.25 | | 4.28% |

³ If the device requires additional shut down time (beyond 0.5 s but less than 1 s) then this should be stated on this form.

| | | | | |
|--|---|-------------------|----------------------|---------------------------------|
| Step g) 50.00 Hz ± 0.01 Hz | 3687 | 50.00 | | NA |
| Test sequence at Registered Capacity 40% - 60% | Measured Active Power Output(W) | Frequency (Hz) | Primary Power Source | Active Power Gradient |
| Step a) 50.00 Hz ± 0.01 Hz | 1818 | 50.00 | DC SOURCE | NA |
| Step b) 50.25 Hz ± 0.05 Hz | 1772 | 50.25 | | 3.95% |
| Step c) 50.70 Hz ± 0.10 Hz | 1382 | 50.70 | | 4.17% |
| Step d) 51.15 Hz ± 0.05 Hz | 970 | 51.15 | | 4.07% |
| Step e) 50.70 Hz ± 0.10 Hz | 1382 | 50.70 | | 4.17% |
| Step f) 50.25 Hz ± 0.05 Hz | 1773 | 50.25 | | 4.04 % |
| Step g) 50.00 Hz ± 0.01 Hz | 1815 | 50.00 | | NA |

| Power output with falling frequency test: This test should be carried out in accordance with A.1.2.7. | | | |
|--|--|-----------|----------------------|
| Test sequence | Measured Active Power Output | Frequency | Primary power source |
| Test a) 50 Hz ± 0.01 Hz | 3672.24 W | 50.00 Hz | 3792.2 W |
| Test b) Point between 49.5 Hz and 49.6 Hz | 3649.42 W | 49.55 Hz | 3790.8 W |
| Test c) Point between 47.5 Hz and 47.6 Hz | 3667.59 W | 47.55 Hz | 3791.5 W |
| NOTE: The operating point in Test (b) and (c) shall be maintained for at least 5 minutes | | | |

| Re-connection timer. | | | | | |
|--|----------------|---|-----------------|-----------------|-----------------|
| Test should prove that the reconnection sequence starts after a minimum delay of 20 s for restoration of voltage and frequency to within the stage 1 settings of Table 2. Both the time delay setting and the measured delay should be provided in this form; both should be greater than 20 s to pass. Confirmation should be provided that the Micro-generating Plant does not reconnect at the voltage and frequency settings below; a statement of "no reconnection" can be made. | | | | | |
| Time delay setting | Measured delay | Checks on no reconnection when voltage or frequency is brought to just outside stage 1 limits of table 2. | | | |
| 60s | 91s | At 257.0 V | At 191.5 V | At 47.9 Hz | At 52.1 Hz |
| Confirmation that the Micro-generator does not re-connect. | | No reconnection | No reconnection | No reconnection | No reconnection |

| | | | | | |
|---|----------|-------|----------------------------|--------|------------|
| Fault level contribution: These tests shall be carried out in accordance with EREC G98 Annex A1 A.1.3.5 (Inverter connected) and Annex A2 A.2.3.4 (Synchronous). Please complete each entry, even if the fault contribution is zero. | | | | | |
| For machines with electro-magnetic output | | | For Inverter output | | |
| Parameter | Symbol | Value | Time after fault | Volts | Amps |
| Peak Short Circuit current | i_p | | 20 ms | 38V | 47A |
| Initial Value of aperiodic current | A | | 100 ms | 0V | 0 A |
| Initial symmetrical short-circuit current* | I_k | | 250 ms | 0 V | 0 A |
| Decaying (aperiodic) component of short circuit current* | i_{DC} | | 500 ms | 0V | 0 A |
| Reactance/Resistance Ratio of source* | X/R | | Time to trip | 15.8ms | In seconds |
| For rotating machines and linear piston machines the test should produce a 0 s – 2 s plot of the short circuit current as seen at the Micro-generator terminals. | | | | | |
| * Values for these parameters should be provided where the short circuit duration is sufficiently long to enable interpolation of the plot | | | | | |

| | |
|---|-----|
| Logic Interface | Yes |
| Self-Monitoring solid state switching: No specified test requirements. Refer to EREC G98/N1 Annex A1 A.1.3.6 (Inverter connected). | NA |
| It has been verified that in the event of the solid state switching device failing to disconnect the Micro-generator , the voltage on the output side of the switching device is reduced to a value below 50 V within 0.5 s. | NA |
| Additional comments | |
| | |